

# FabSlab Granito Pvt. Ltd.

#### **CORPORATE OFFICE**

C-1226, Siddhi Vinayak Tower,
Near Kataria Arcade, Makarba,
Ahmedabad-380051, Gujarat, India.
Email: export@fabslab.in, marketing@fabslab.in
Mobile: +91 78744 93382, +91 97267 20070

#### PLANT

Morbi-Halwad Road, State Highway No. 22, Nichi Mandal, Morbi-363641, Gujarat, India.

www.fabslab.in


800X2400 mm

15 mm I 18 mm

www.fabslab.in



# It's AMALGAMATION of PURE SOUL, MAGICAL BODY, FINEST SKIN

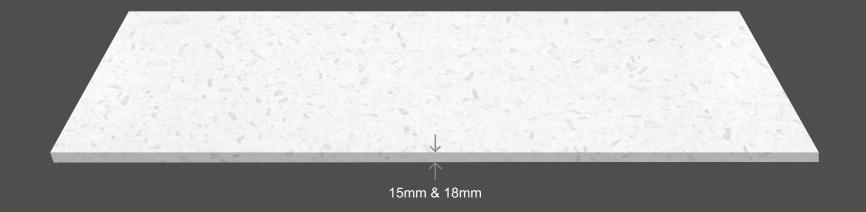





OUTSTANDING COMBINATION OF

STRENGTH & & BEAUTY

THICKNESS

15MM & 18MM

# MAXIMIZE YOUR ASPIRATION

Classic slabs for your classic applications.





# FEATURES THAT MAKE US AWESOME















# APPLICATIONS

THAT MAKE YOU EXCLAIM "WOW"


















POLISHED MATT









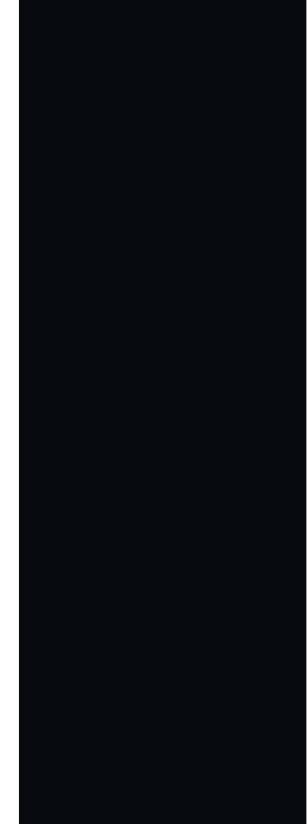


CRYSTAL NANO BLACK

> Thickness 15mm | 18mm





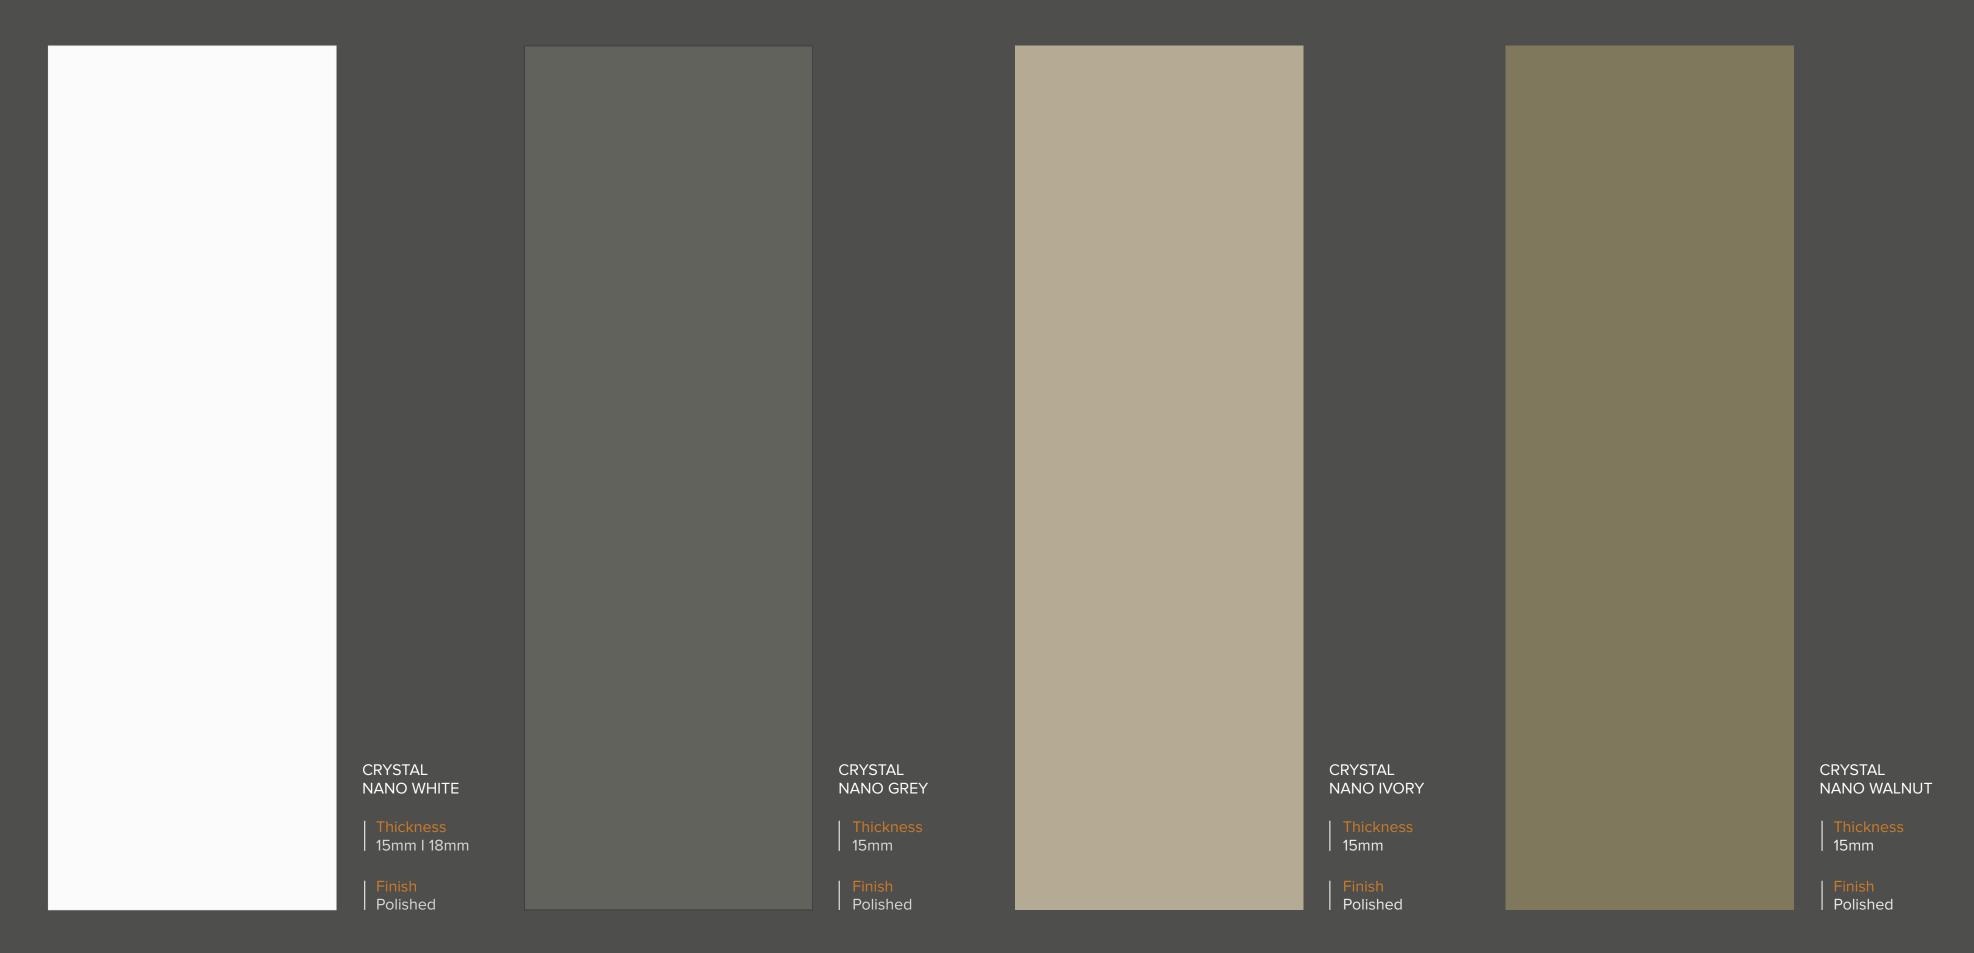








CRYSTAL NANO BROWN

Thickness
15mm







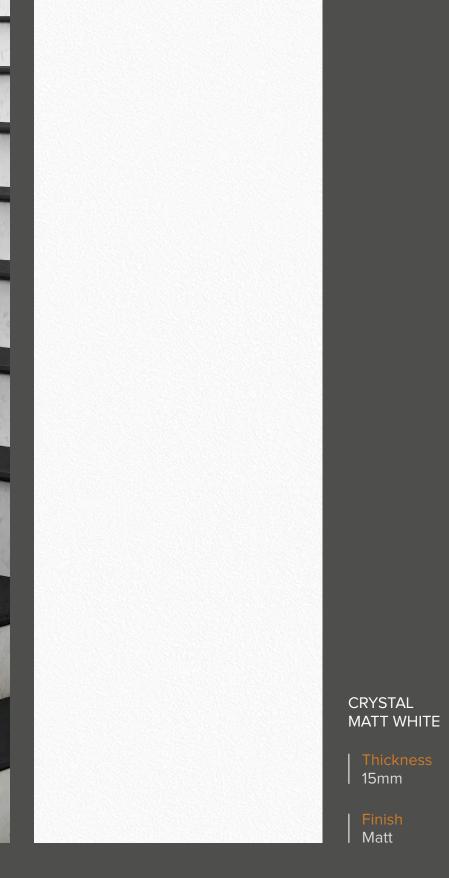




Thickness 15mm









POLISHED



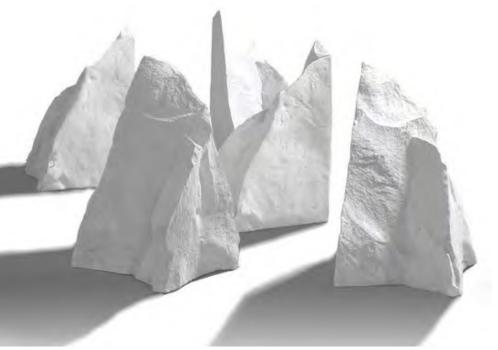






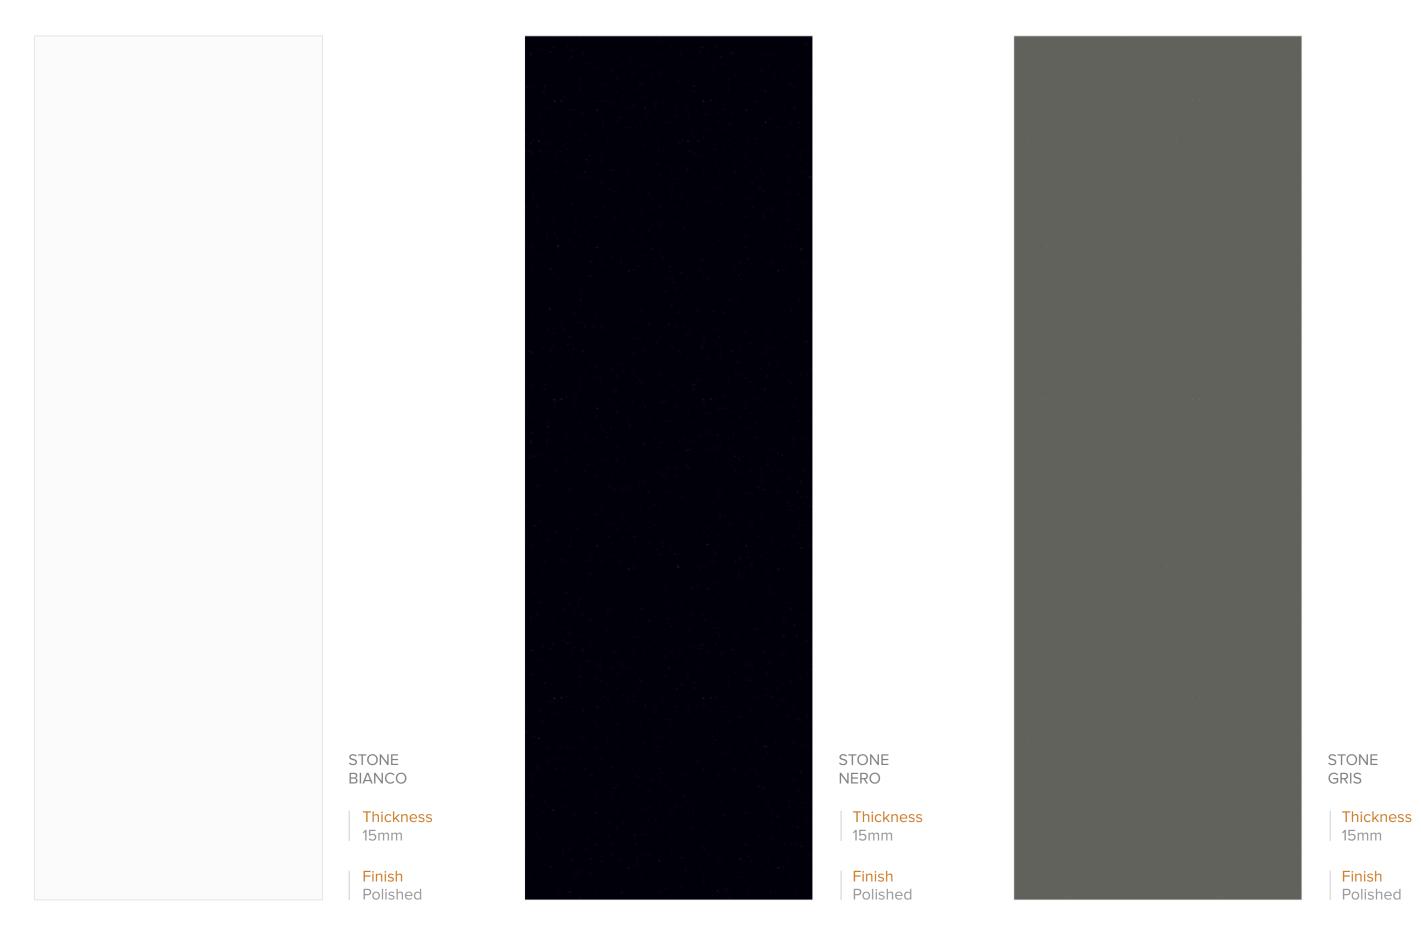

www.fabslab.in





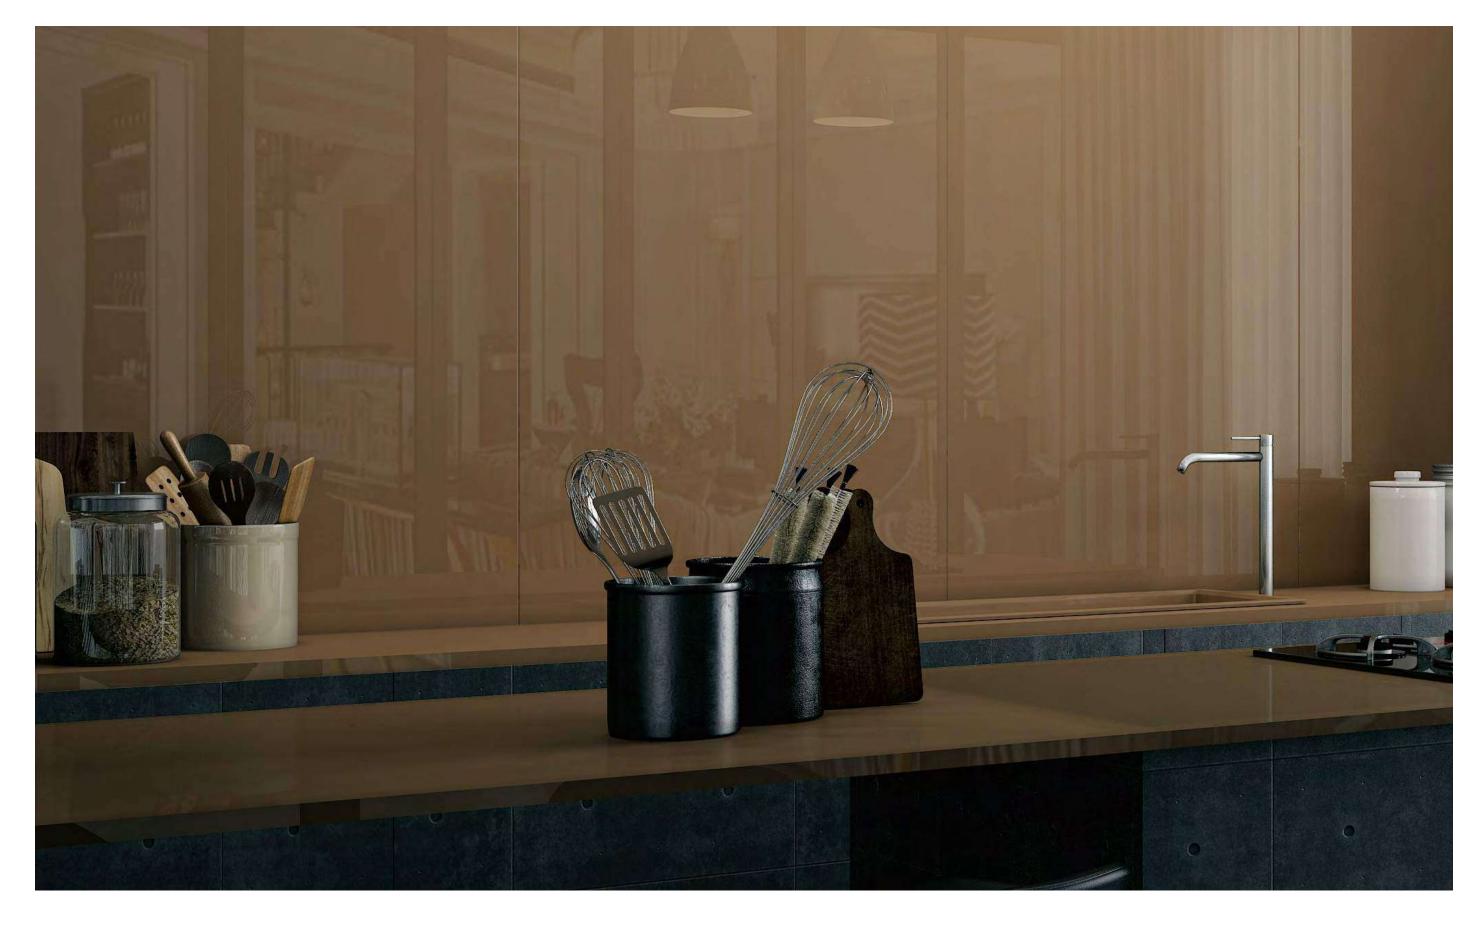



Thickness 15mm














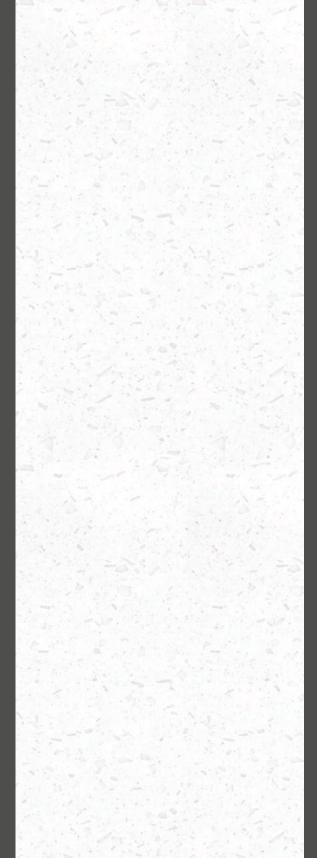

ICE WHITE


Thickness
15mm & 18mm

| Finish | Polished






POLISHED

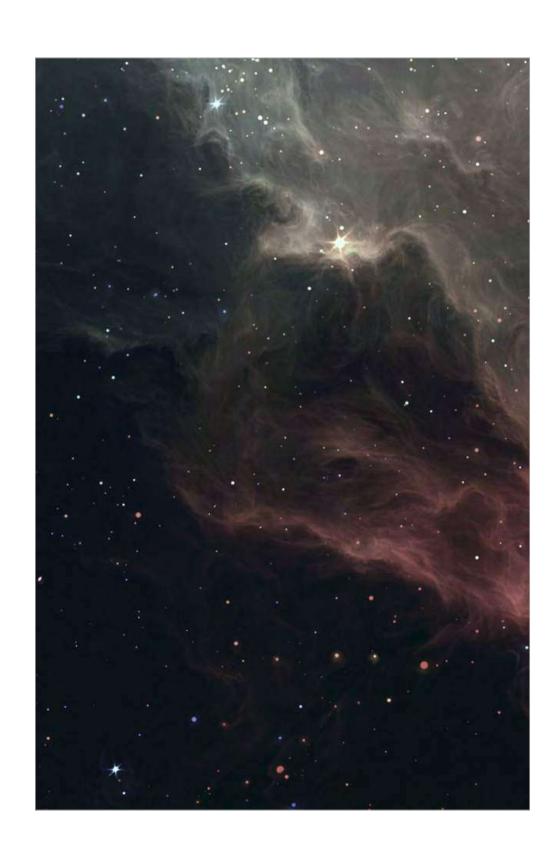








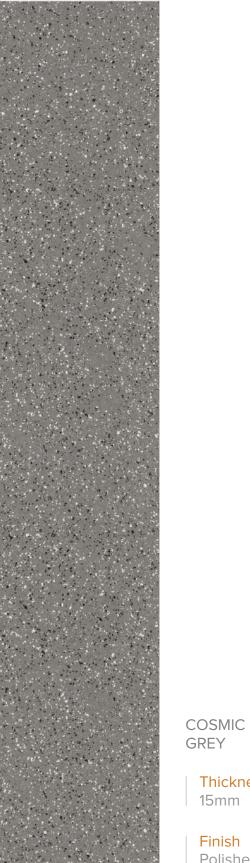



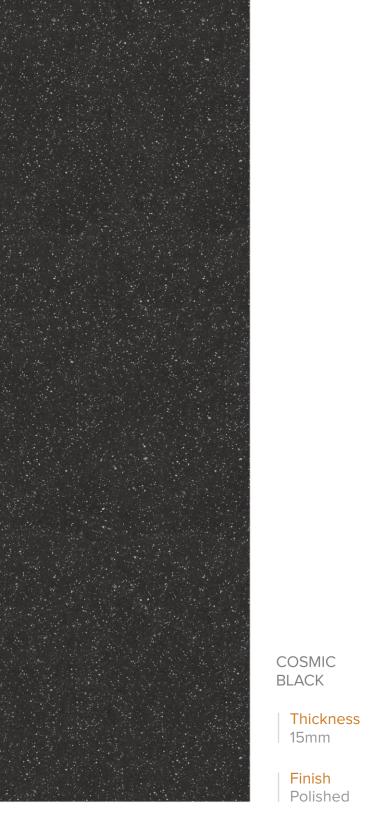



COSMIC WALNUT


Thickness 15mm

Finish
Polished

GREY

Thickness 15mm



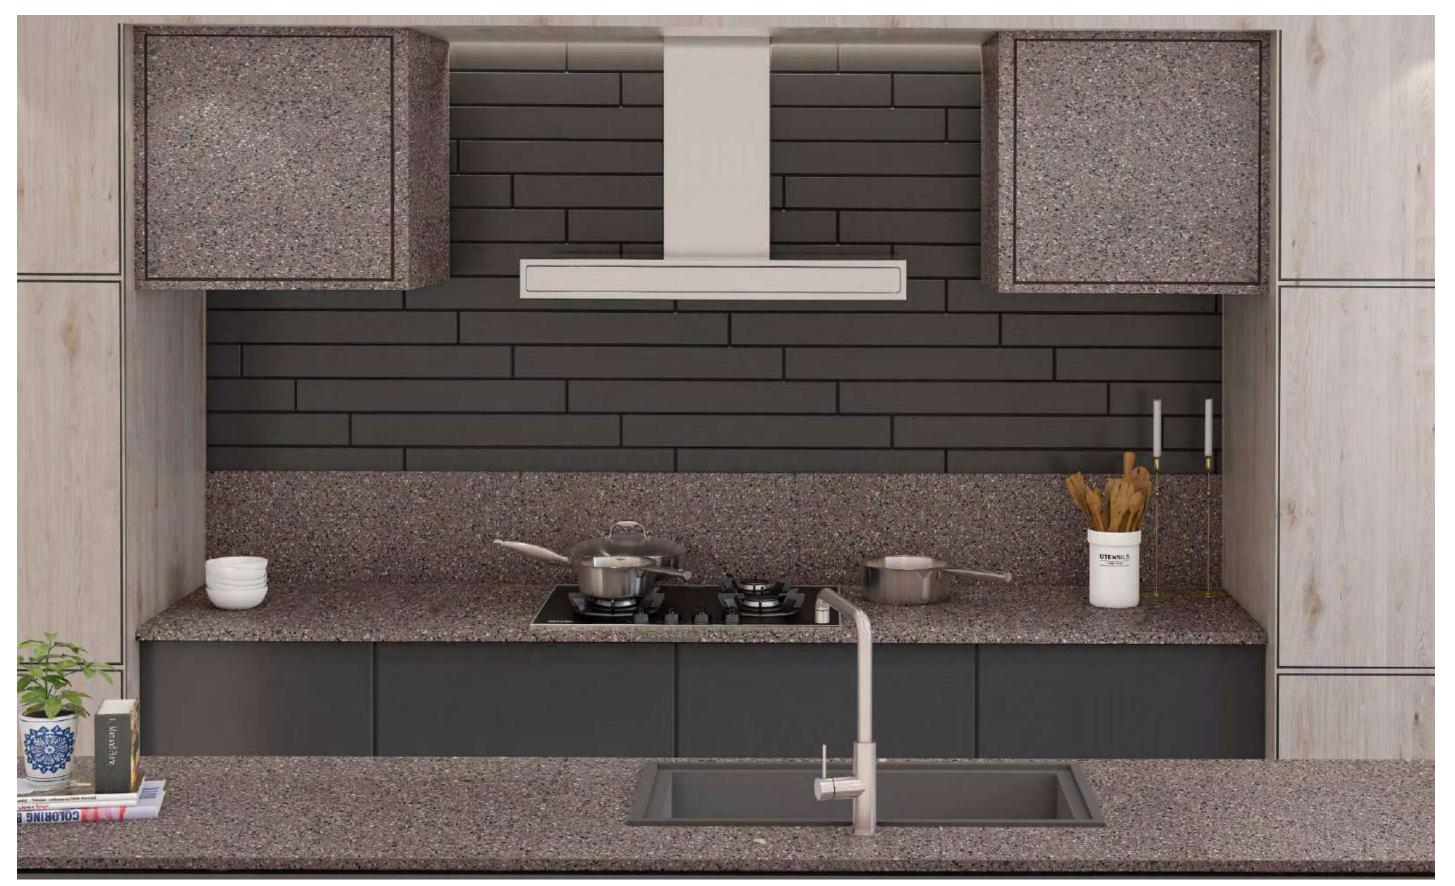









POLISHED

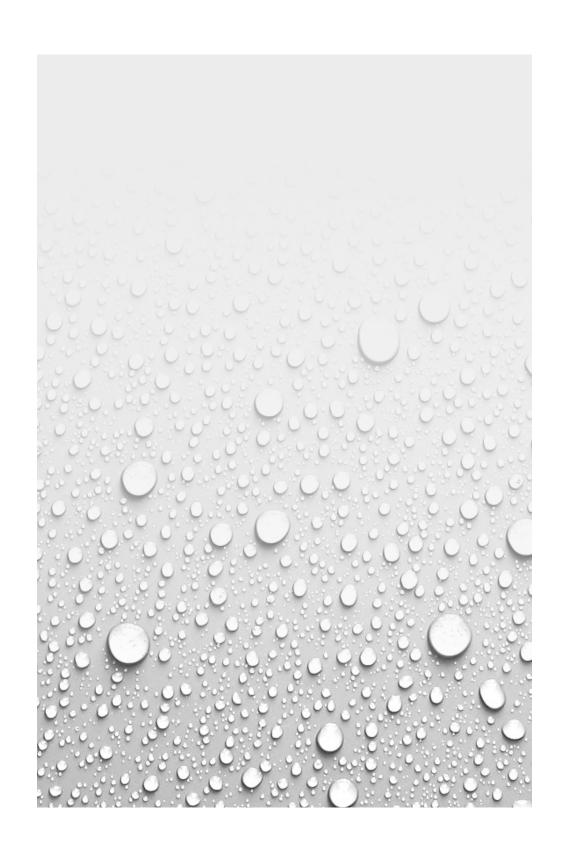





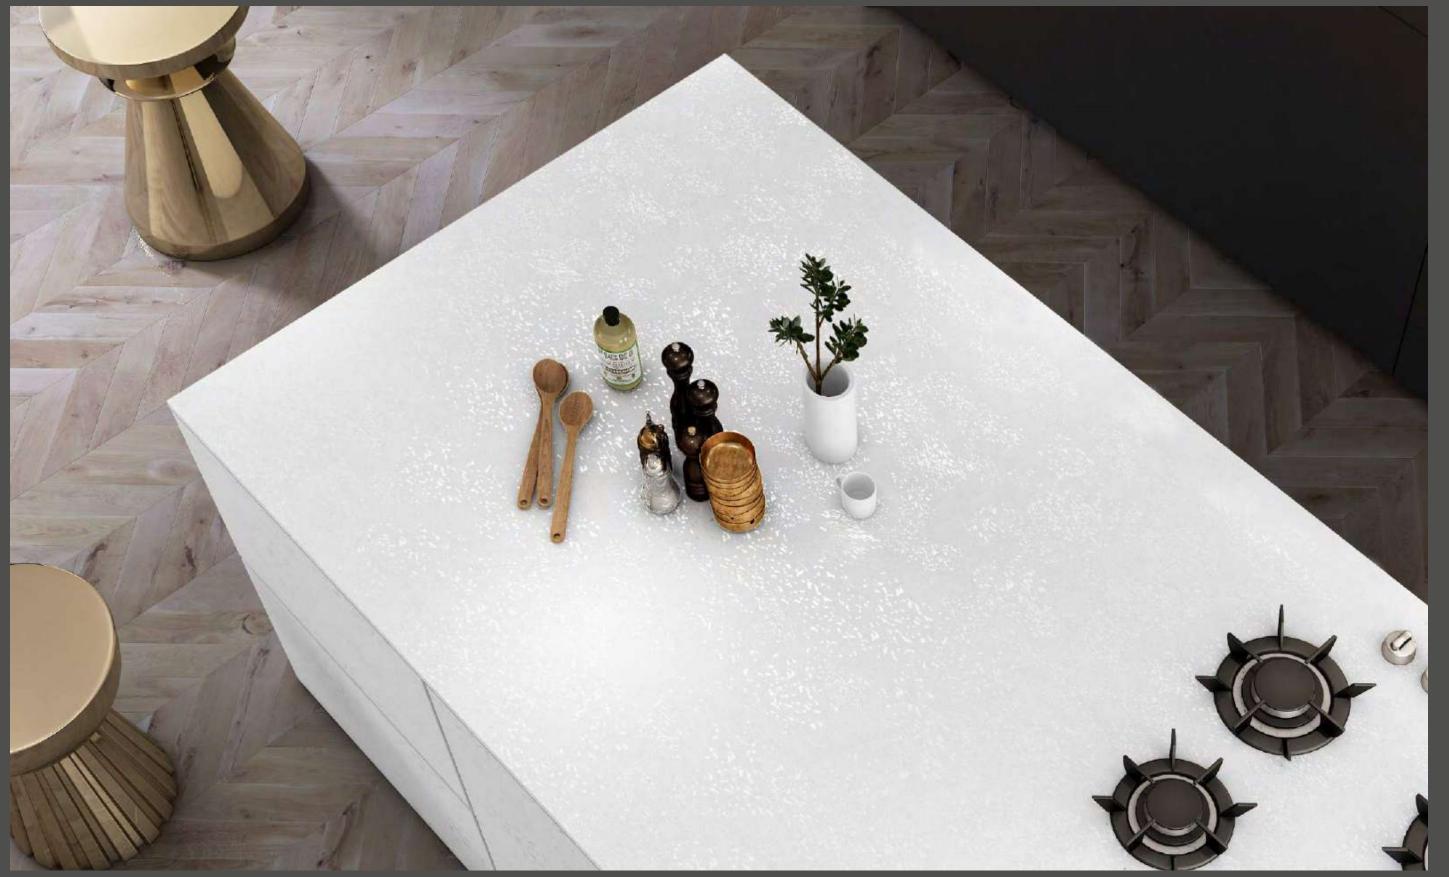



SPARKLE WHITE

| Thickness | 15mm

| Finish | Carving









SPARKLE GREY

Thickness 15mm

Finish Carving




SPARKLE BLACK Thickness 15mm Finish Carving






POLISHED

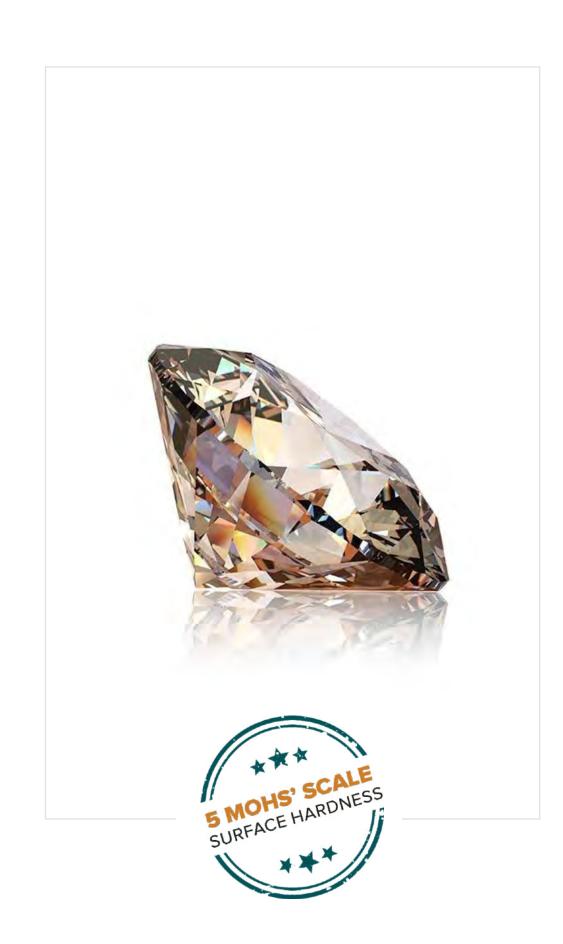





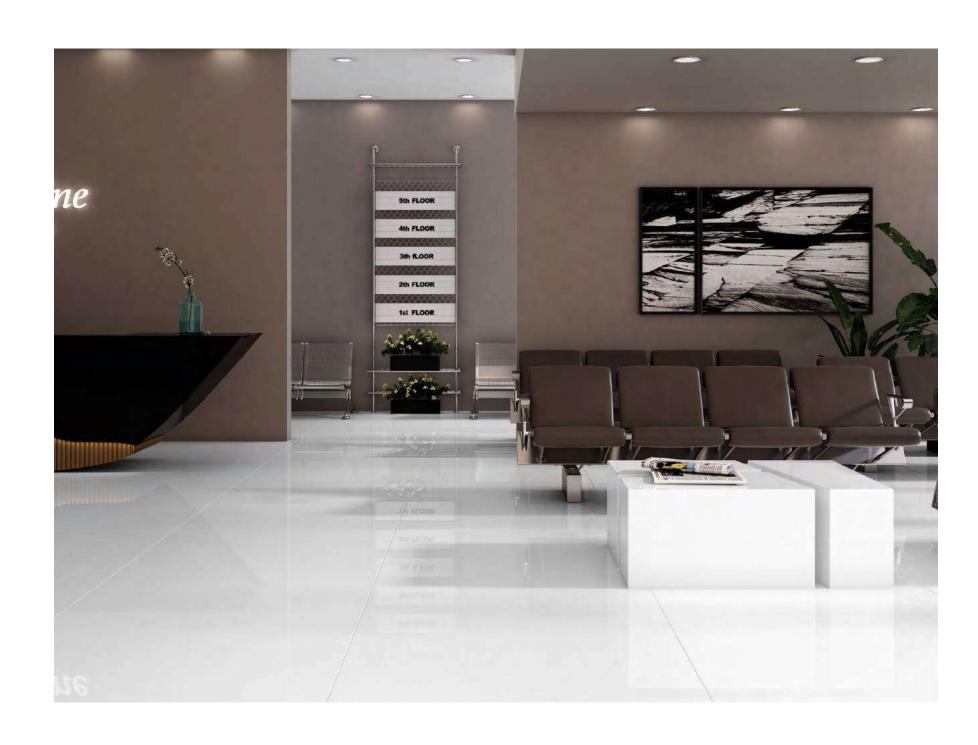

- **DIAMOND HARDNESS**: We are offering unique performance levels of hardness.
- **LEVEL**: We provide surface hardness of slab more than 5 Mohs' scale which increase the scratch hardness of slab tiles.
- APPLICATION: Diamond series are suitable for surfaces of High traffic Area, Industrial Laying, Floor Coatings, Parking Areas.



DIAMOND

Finish

Polished

Thickness

15mm I 18mm

WHITE

BLACK

Thickness 15mm I 18mm





POLISHED











AUSTRAL GOLD

> Thickness 15mm








BLACK MARQUINA Thickness Finish Polished

15mm

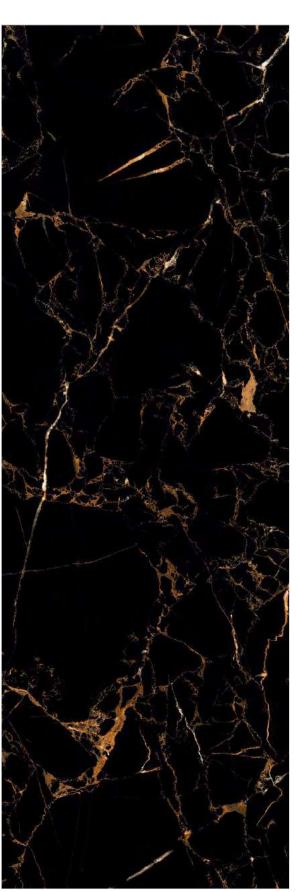

EMPERADOR GOLD Thickness 15mm







Thickness

Thickness 15mm











SILVER PORTORO

Thickness 15mm

Finish Polished



PORTORO ARGENTO

Thickness 15mm







15mm

Finish Polished











BIANCO PEARL | Thickness | 15mm

| Finish | Polished










ALPS STATUARIO

Thickness 15mm

| Finish | Polished





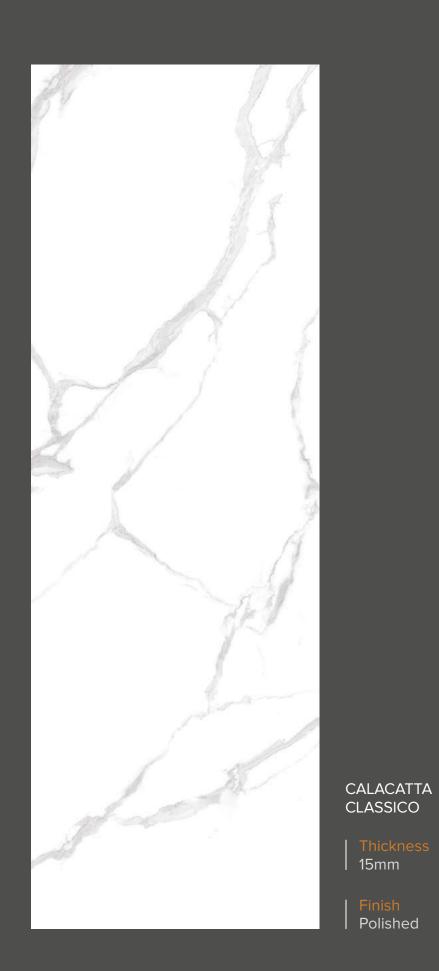

15mm

Finish Polished









CALACATTA VENATO

| Thickness | 15mm

| Finish | Polished

| Thickness | 15mm | Finish | Polished

ROMAN STATUARIO



# APPLICATION AREA







**TABLE TOP** 

WORK DESK

DINING TABLE





**FURNITURES** 



WASH BASIN








WINDOW/ DOOR SILL

FLOORING HEAVY TRAFFIC AREA

### **EDGE PROFILES**

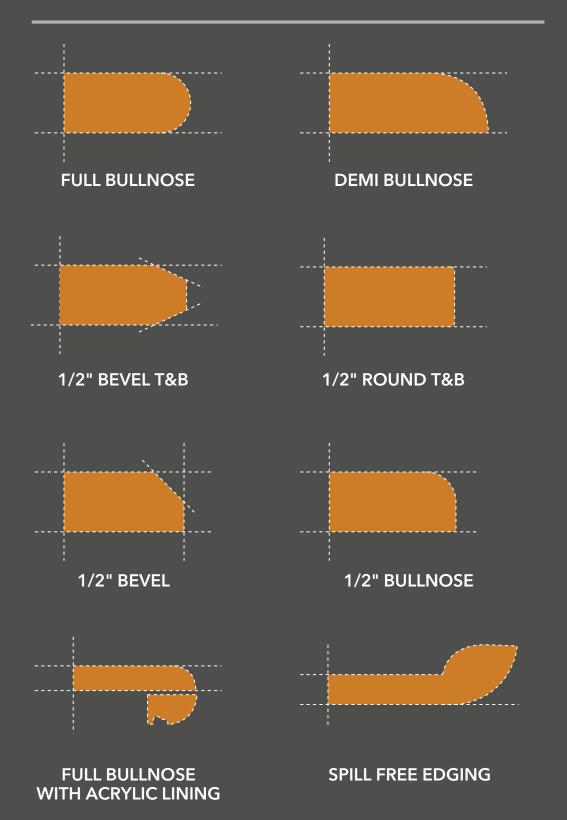

www.fabslab.in



# Technical Specification (15-18mm)

			1
CHARACTERISTICS	STANDARD AS PER ISO-13006/En14411 GROUP	VALUES	TEST METHOD
	REGULATORY PRO	PERTIES	
Deviation in Length & Width	0.50%	0.20%	ISO - 10545-2
Deviation in Thickness	0.50%	0.50%	ISO - 10545-2
Straightness of Sides	0.50%	0.20%	ISO - 10545-2
Rectangularity	0.50%	0.20%	ISO - 10545-2
Surface Flatness	0.50%	0.20%	ISO - 10545-2
Color Difference	Unaltered	No Change	ISO - 10545-16
Glossiness	As per Mfg.	>90%	Glossmeter
	STRUCTURAL PRO	DPERTIES	
Water Absorption	<0.05%	<0.05%	ISO - 10545-3
Apparent Density	>2.00 g/cc	>2.10 g/cc	DIN 51082
	MASSIVE MECHANICAI		
Modulus of Repture	Min 35N/MM2	 Min 42N/MM2	ISO - 10545-4
Breaking Strength	Min. 1300 N	Min. 2800 N	ISO - 10545-4
Impact Resistance	As per Mfg.	Min. 0.75	ISO - 10545-5
past (teeletanee	SURFACE MECHANICA		100 100 10 0
Surface Abrasion Resistance	As per Mfg.	 Min. class 3	ISO - 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	EN 101
	THERMO HYGROMETRI		1
Frost Resistance	No Damage	No Damage	ISO - 10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO - 10545-09
Moisture Expansion	Nil	Nil	ISO - 10545-10
Thermal Expansion	Max 9.0x10 -6	Max 6.5x10 -6	ISO - 10545-08
Crazing Resistance	As per Mfg.	Min 10 Cycle	ISO - 10545-11
	CHEMICAL PROF	PERTIES	
Chemical Resistance	No Damage	No Damage	ISO - 10545-13
Stain Resistance	Resistant	Resistant	ISO - 10545-14
	SAFETY PROPE	RTIES	
Slip Resistance	As per Mfg.	>0.40	ISO - 10545-17
Fire Resistance	As per Mfg.	Fire Proof	N.A.

#### PACKING DETAILS

TILE SIZE	THICKNESS (approx.)	NO. OF TILES/BOX	WEIGHT/BOX (approx.)	COVERAGE AREA
800 X 2400	15 MM	1Pc	70 Kg.	20.67 Sq.Ft
	18 MM	1Pc	81 Kg.	20.67 Sq.Ft

www.fabslab.in